查询344601供应商



# Low Profile Snap Mount Type

**APPROVALS:** Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

**SPECIFICATIONS:**

**Electrical: 348 Series:** Rated at 15 amps for any voltage up to 250 volts.
**344 Series:** Rated at 15 amps at lamp voltage shown below.
**Dielectric Strength:** 1500 volts minimum.
When designing indicating type fuseholders into a circuit, consideration should be given to the resistance of fractional amperage fuses and the parallel resistance of the indicator lamp and its resistor.

**Mounting:** Panel thickness range: .031" through .125".
**Molded Parts:** Black phenolic body (UL 94V0). Thermoplastic bezel, cap and lens (UL94V2). See tables below for colors.
**Terminals:** Brass. Tin-plated.
**Ambient Temperature:**
Non-indicating: –40°C to +85°C.
Indicating: –40°C to +60°C.
**Fuse Installation:** Insert a fuse into the cap and push the assembly into the body until it latches. Press in and down to unlatch for removal.
**PATENTED**

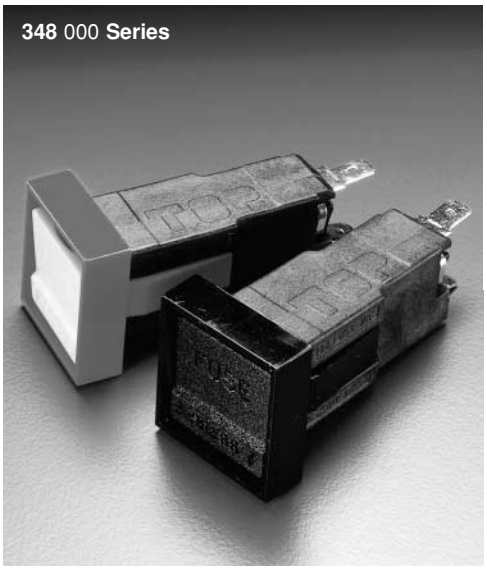


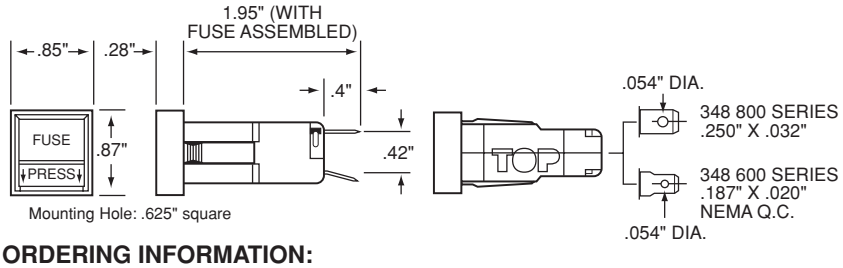


## ORDERING INFORMATION:

| Six-Digit Catalog Numbers Consist of: | | | |
|---|---|---|---|
| Series Number | Terminal Style | Bezel Color | Cap Color |
| — — — | — | — | — |
| **348** for 3AG Fuses | **6** for 3/16" wide NEMA Q.C. Terminal<br>**8** for 1/4" wide | **7** for Black | **1** for Red<br>**7** for Black |

**Example:** 3 4 8 6 1 1

# Blown-Fuse Indicating Snap Mount Type

**APPROVALS AND SPECIFICATIONS:** See above.

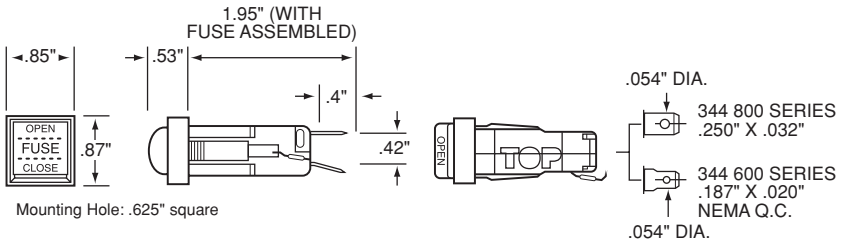


## ORDERING INFORMATION:

| Catalog Number | | Lamp Type | Lamp Voltage | Lamp Current | Resistor | Lens Color |
|---|---|---|---|---|---|---|
| 3/16" Q.C. Terminals | 1/4" Q.C. Terminals | | | | | |
| **344** 601 | **344** 801 | Incandescent | 6 | 40 ma | No | Amber |
| **344** 602 | **344** 802 | Incandescent | 14 | 80 ma | No | Amber |
| **344** 603 | **344** 803 | Incandescent | 28 | 40 ma | No | Amber |
| **344** 604 | **344** 804 | Neon | 120 | 1.2 ma | Yes | Clear |
| **344** 605 | **344** 805 | Neon | 240 | .3 ma | Yes | Clear |